


### Active 10" Studio Subwoofer




### Packaging



Cardboard box dimensions (HxWxD):  
620 x 485 x 575 mm / 24.41" x 19.10" x 22.64"  
Total weight:  
26 kg / 57.32 lb.

### Frequency Response

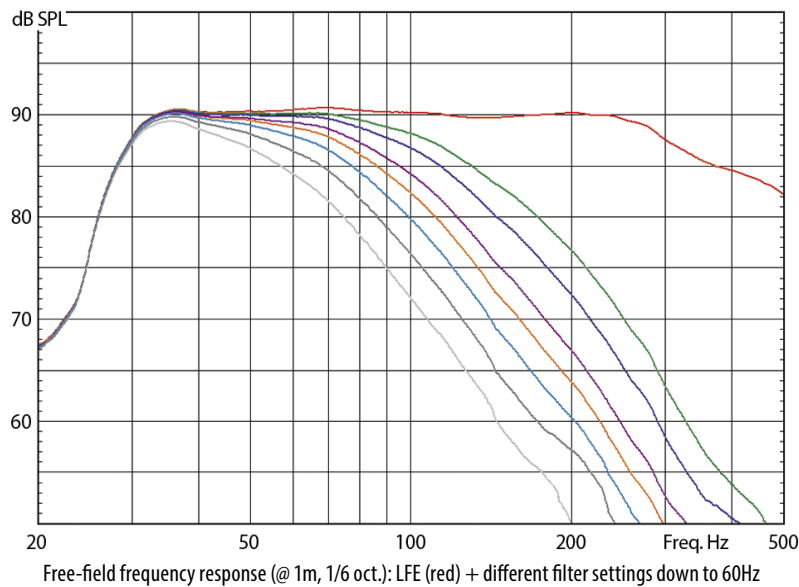

### Specification Chart

Dimensions (WxHxD)	330 x 485 x 430 mm	Phase inversion	0°/180°	XLR in right	impedance 10kΩ
Dimensions (WxHxD)	12.99" x 19.09" x 16.93"	Switchable satellite filter	flat/80Hz	XLR in LFE	impedance 10kΩ
Free-field freq. range (-3dB)	28Hz - 300Hz	Variable subwoofer filter	60-140Hz + LFE	XLR out satellite left	impedance 10kΩ
Woofer	250mm/10"	LED brightness setting		XLR out satellite right	impedance 10kΩ
Maximum SPL @ 1m	108dB	Level lock dip switch		XLR out (LFE)	impedance 10kΩ
Number of amplifiers	1	Filter lock dip switch		<b>Power consumption</b>	
Output power	250W	Input level dip switch	+7dBu/+22dBu	Standby	< 1W
Protection	Limiter	Auto-standby dip switch		Full output	250VA
<b>User settings</b>		<b>Connectors</b>		<b>Misc.</b>	
System volume (Satellites & Sub)	-inf. - +6dB	RCA in (mono)	impedance 10kΩ	IR remote control	
Subwoofer volume	-inf. - +6dB	XLR in left	impedance 10kΩ	Weight	19.6 kg / 43.2 lb

### Physical Data

